


# JACKCON Electrolytic Capacitors

## VARISTOR 10V 突波吸收器

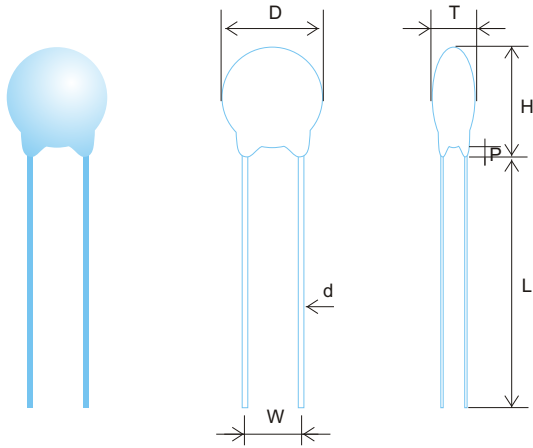

Dimension	Unit : mm
D max	14.0
H max	17.0
W max ( ±1.0)	7.5
L min	25.0
P max	3.0
d ( ±0.02)	0.8

### Device Ratings and Characteristics

Part No	Maximum Allowable Voltage		Varistor Voltage (@1mA)			Clamping Voltage @ Test Current (8/20 μs)		Maximum Energy (j)	Maximum Peak Current (8/20 μs)	Rated Power	Typical Capacitance (@1KHz)
	AC rms (V)	DC (V)	Min	Vb (Vdc)	Max	Vc (v)	Jp (A)	10/1000 μs	(A)	(W)	(pf)
10V201K	130	175	185	200	225	340	25	35.0	3500	0.40	430
10V221K	140	180	198	220	242	360	25	39.0	3500	0.40	410
10V241K	150	200	216	240	264	395	25	42.0	3500	0.40	380
10V271K	180	230	247	270	303	455	25	49.0	3500	0.40	350
10V301K	195	250	270	300	330	500	25	55.0	3500	0.40	330
10V331K	210	275	297	330	363	540	25	58.0	3500	0.40	300
10V361K	230	300	324	360	396	595	25	65.0	3500	0.40	300
10V391K	250	320	351	390	429	650	25	70.0	3500	0.40	300
10V431K	275	350	387	430	473	710	25	80.0	3500	0.40	270
10V471K	300	385	423	470	517	775	25	85.0	3500	0.40	230
10V511K	320	420	459	510	561	845	25	92.0	3500	0.40	210