


# JACKCON Electrolytic Capacitors

## VARISTOR 14V 突波吸收器

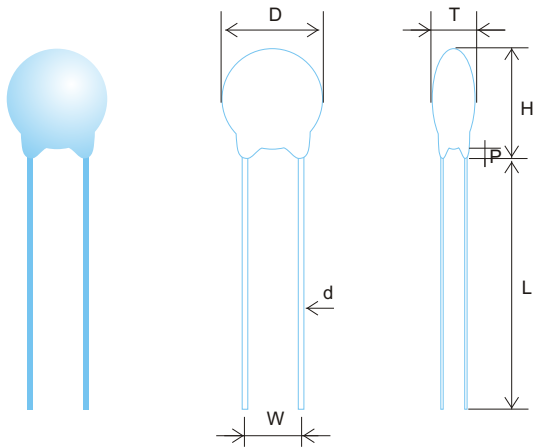

Dimension	Unit : mm
D max	17.5
H max	20.5
W max ( ±1.0)	7.5
L min	25.0
P max	3.0
d ( ± 0.02)	0.8

### Device Ratings and Characteristics

Part No	Maximum Allowable Voltage		Varistor Voltage (@1mA)			Clamping Voltage @ Test Current (8/20 μs)		Maximum Energy (j)	Maximum Peak Current (8/20 μs)	Rated Power	Typical Capacitance (@1KHz)
	AC rms (V)	DC (V)	Min	Vb (Vdc)	Max	Vc (v)	Jp (A)	10/1000 μs	(A)	(W)	(pf)
14V201K	130	175	185	200	225	340	50	70.0	6000	0.60	770
14V221K	140	180	198	220	242	360	50	78.0	6000	0.60	740
14V241K	150	200	216	240	264	395	50	84.0	6000	0.60	700
14V271K	180	230	247	270	303	455	50	99.0	6000	0.60	640
14V301K	195	250	270	300	330	500	50	108.0	6000	0.60	600
14V331K	210	275	297	330	363	540	50	115.0	6000	0.60	580
14V361K	230	300	324	360	396	595	50	130.0	6000	0.60	540
14V391K	250	320	351	390	429	650	50	140.0	6000	0.60	500
14V431K	275	350	387	430	473	710	50	155.0	6000	0.60	450
14V471K	300	385	423	470	517	775	50	175.0	6000	0.60	400
14V511K	320	420	459	510	561	845	50	190.0	6000	0.60	350