


JACKCON Electrolytic Capacitors

VARISTOR 20V 突波吸收器

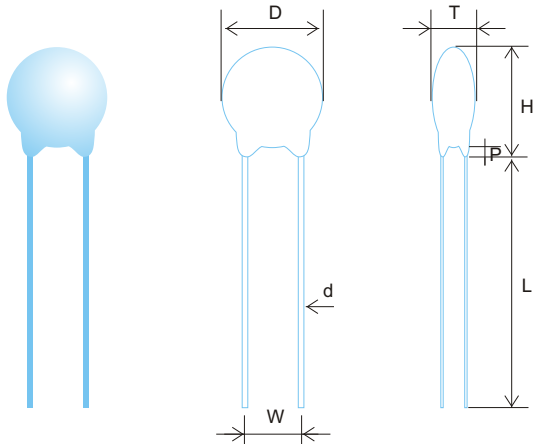

Dimension	Unit : mm
D max	25.0
H max	28.0
W max (±1.0)	10.0
L min	25.0
P max	3.0
d (±0.02)	1.0

Device Ratings and Characteristics

Part No	Maximum Allowable Voltage		Varistor Voltage (@1mA)			Clamping Voltage @ Test Current (8/20 μs)		Maximum Peak Current (8/20 μs)	Rated Power	Typical Capacitance (@1KHz)
	AC rms (V)	DC (V)	Min	Vb (Vdc)	Max	Vc (V)	Jp (A)	(A)	(W)	(pf)
20V201K	130	175	185	200	225	340	100	10000	1.00	1700
20V221K	140	180	198	220	242	360	100	10000	1.00	1600
20V241K	150	200	216	240	264	395	100	10000	1.00	1500
20V271K	180	230	247	270	303	455	100	10000	1.00	1300
20V301K	195	250	270	300	330	500	100	10000	1.00	1200
20V331K	210	275	297	330	363	540	100	10000	1.00	1100
20V361K	230	300	324	360	396	595	100	10000	1.00	1100
20V391K	250	320	351	390	429	650	100	10000	1.00	1100
20V431K	275	350	387	430	473	710	100	10000	1.00	1000
20V471K	300	385	423	470	517	775	100	10000	1.00	900
20V511K	320	420	459	510	561	845	100	10000	1.00	800