


JACKCON Electrolytic Capacitors

VARISTOR 18V 突波吸收器

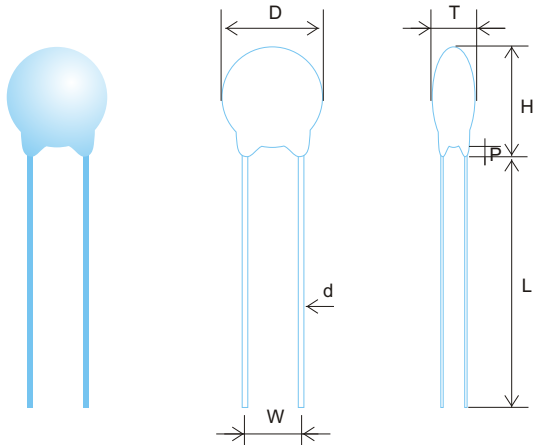

Dimension	Unit:mm
D max	23.0
H max	26.0
W max (±1.0)	7.5
L min	25.0
P max	3.0
d (± 0.02)	0.8

Device Ratings and Characteristics

Part No	Maximum Allowable Voltage		Varistor Voltage (@1mA)			Clamping Voltage @ Test Current (8/20 μs)		Maximum Peak Current (8/20 μs)	Rated Power	Typical Capacitance (@1KHz)
	AC rms (V)	DC (V)	Min	Vb (Vdc)	Max	Vc (V)	Jp (A)	(A)	(W)	(pf)
18V201K	130	175	185	200	225	340	75	9000	0.80	1350
18V221K	140	180	198	220	242	360	75	9000	0.80	1290
18V241K	150	200	216	240	264	395	75	9000	0.80	1200
18V271K	180	230	247	270	303	455	75	9000	0.80	1100
18V301K	195	250	270	300	330	500	75	9000	0.80	1030
18V331K	210	275	297	330	363	540	75	9000	0.80	1000
18V361K	230	300	324	360	396	595	75	9000	0.80	930
18V391K	250	320	351	390	429	650	75	9000	0.80	870
18V431K	275	350	387	430	473	710	75	9000	0.80	780
18V471K	300	385	423	470	517	775	75	9000	0.80	710
18V511K	320	420	459	510	561	845	75	9000	0.80	630